

3 Windows Display Based on 4K1K Pixel to Pixel Split
4:4:4 10Bit 60Hz Processing



MODEL **VS2**

- Support Split, Multiple Windows Display, and Preview Working Mode
- Support Seamless Switching Between Any Signal
- Support OSD
- Support 4K1K Pixel to Pixel Split
- Support Flexible Split With Ultra-wide Range
- Support Signal Hot Backup
- Support Cascade Split
- Support Optional Module
- Support API
- Support 4:4:4 10Bit 60Hz Processing


SPROLINK®

www.sprolink.com

PRODUCT FEATURES


Optional Module Slot

VS2 Supports any 4 optional modules, Including Genlock, SDI, HDMI1.4, DVI, VGA/YPbPr, USB

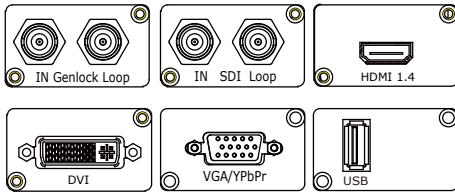


4K1K Output Preview

The Output preview module is used to preview the output signals, by mapping the 2 DVI outputs into one HDMI output port

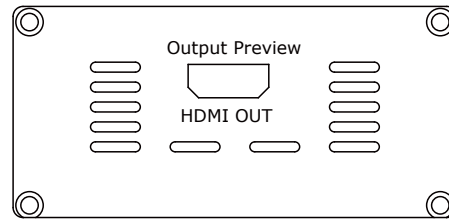


Multiple Windows Display

VS2 Supports max 4 layers display, can overlay anywhere in any position.

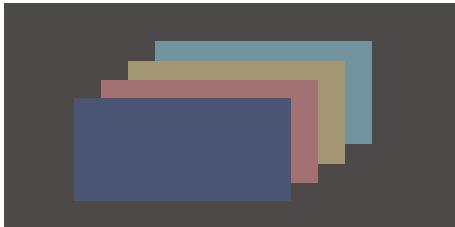

Fade in Fade Out Seamless Switching

VS2 Supports fade-in and fade-out seamless switching and cut switching between any of the 4 layers. It makes the switching more softly and smoothly by 256 level ALPHA.

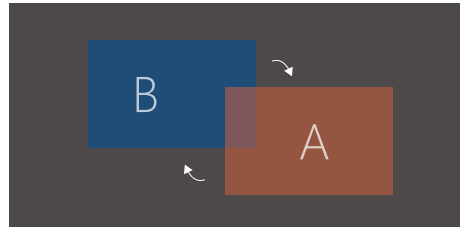

3D Display

VS2 supports left-right 3D split, and can realize one button switching between 2D and 3D display via Software.




LOGO Capture and OSD

VS2 supports any signal capture and OSD as the background display, to realize 4 layers+1 background displaying.



Ultra Wide Range Split

Single port supports widest 3840, and highest 3840 within 2.5Million customized resolution.

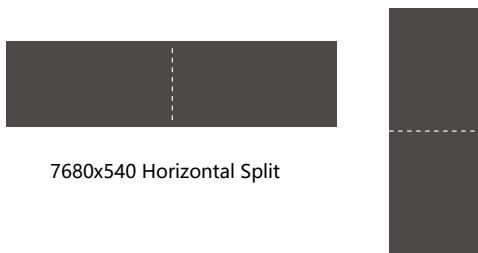


Windows Rotation

Each layer supports 90,180, 270 degree, mirror rotation to realize personalized display.




PRODUCT APPLICATIONS


Application 1: 3 Windows Display Based on 4K1K Split

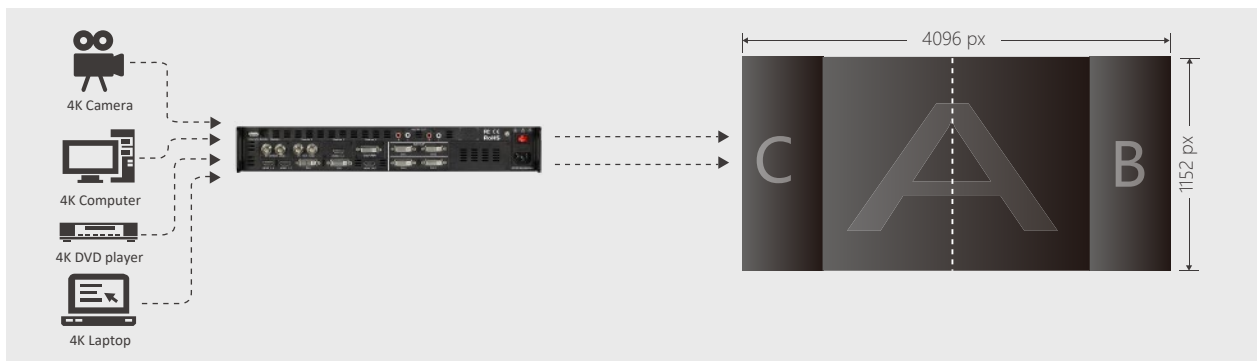


Application 2: Multiple-Window Preview Seamless Switching on Single Port

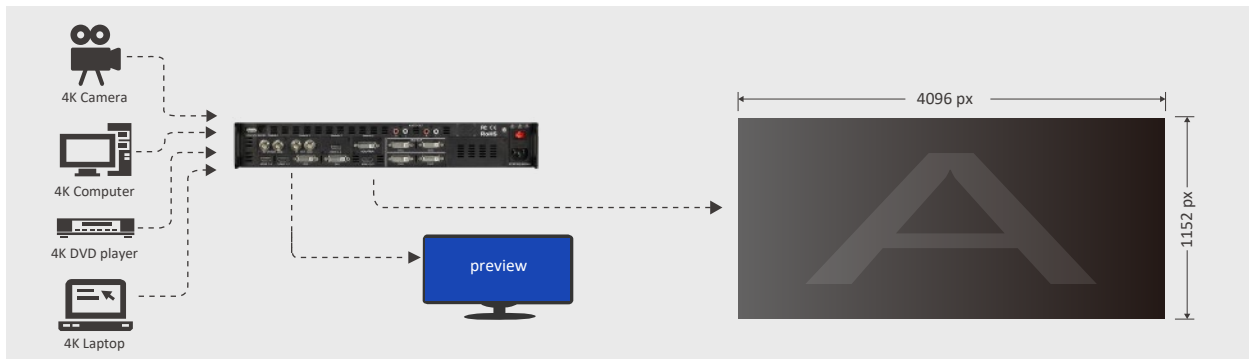

Application 3: Multiple Cascade Horizontal Split

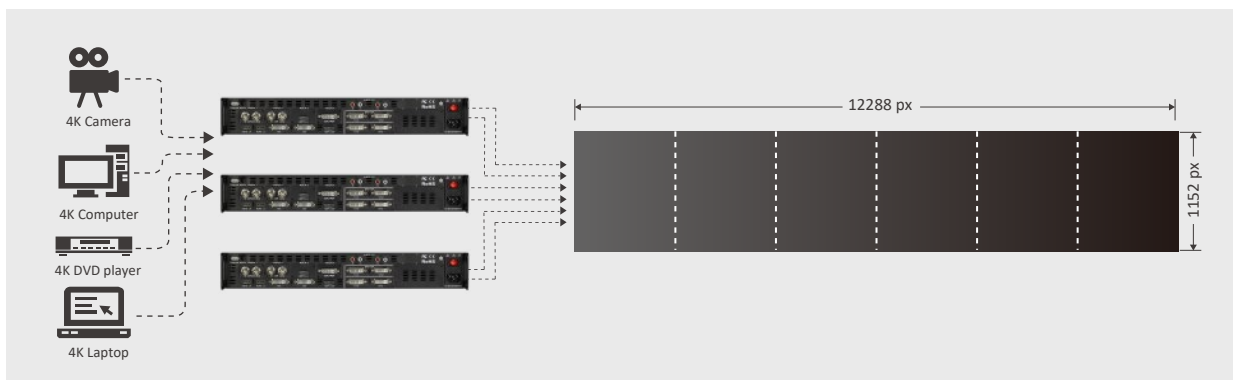

Application 4: Pixel to Pixel Split

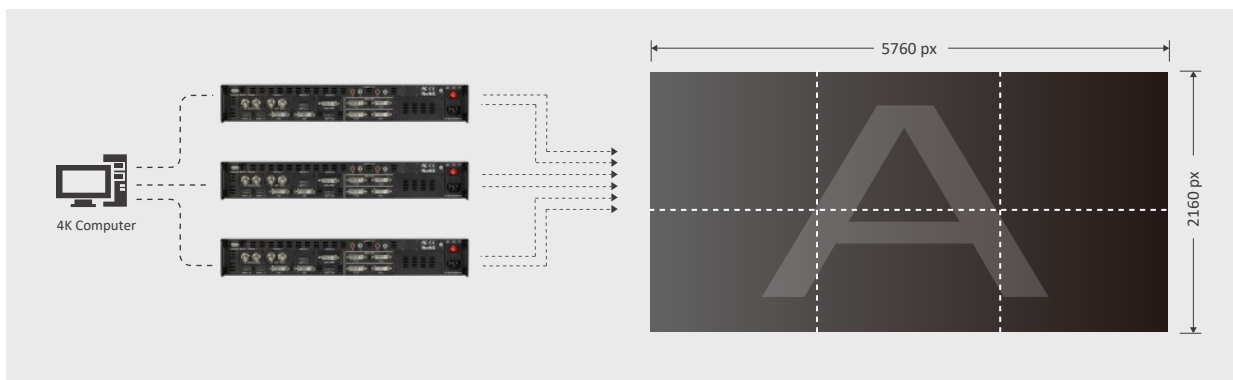



SPECIFICATION

Input Interface	Standard	1 × HDMI 1.4 1 × HDMI 1.3 2 × DVI
	Optional	4 × HDMI 1.3、1.4 4 × DVI 4 × SDI+SDI LOOP 4 × VGA 4 × USB 1 × Genlock IN+Genlock OUT
Output Interface	Standard	2 × DVI(Output)+2 × DVI (Backup) 4× RCA(2xLR Stereo Audio)
	Optional	1 × HDMI(Output Preview)
Operation		Button, RS232, Control Software
Input Resolution	DVI	HDMI1.3
	HDMI	SMPTE: 480i 576i 720p 1080i 1080p VESA: 1024x768 1280x720 1600x1200 1920x1080 1920x1200 2048x1152 3840x1080
	VGA	VESA: 1024x768 1280x1024 1600x1200 1920x1080 1920x1200 2048x1152
	SDI	480i 576i 720p 1080i 1080p 1080 psf
	USB	JPEG、BMP、PNG、MP4、MPEG1、MPEG2、RMVB、MJPEG、MP4、AVI
Output Resolution	VESA	1024x768 1280x720 1280x1024 1400x1050 1600x1200 1920x1080 1920x1200 2048x1152 2560x816 1024x1280 1152x1152 1280x1280 1536x1536 2560x1024 2560x1600 3840x540 Customized point to point display
Support Protocol	DVI	Singlelink
	HDMI	1.3、1.4
	VGA	VGA-U
	SDI	SD-SDI、HD-SDI、3G-SDI
	Refresh Rate	23.98/24/25/29.97/30/50/59.94/60Hz
Input voltage	AC 100~264V (Typical value 110/220) 50/60Hz	
Max power	45W	
TEMP	-25°C~55°C (Typical value 25°C)	
Humidity	20%~90%	
Weight	5.0kg (Equipment Weight) 6.5kg (Transport Weight)	
Size	480mm x 395mm x 67mm (Equipment Size) 540mm x 455mm x 140mm (Transport Size)	

PRODUCT CODE

Product Code	Item	Product Code	Item
P180-VS2-000-01	VS2	P180-VS2-000-05	VGA Input
P180-VS2-000-02	SDI Input	P180-VS2-000-06	USB Input
P180-VS2-000-03	DVI Input	P180-VS2-000-07	Genlock Input
P180-VS2-000-04	HDMI 1.4 Input	P180-VS2-000-08	HDMI Preview Output

