

SPROLINK®

Audio and Video
Processing Equipment



NeoLIVE ME5

Multi-Functional
Live Streaming Switcher with Touch Screen




10.1 Inch Touch Screen

- Supports Dual USB Ports USB Recording and USB Feed Simultaneously
- Supports Flexible PGM & MV Output
- Supports Landscape & Portrait Layout Within the Screen for Various Scenarios
- Dual Channel RTMP Streaming Through Ethernet
- Built-in Media Player for Direct Playback & As Input Source
- Supports Recording by USB Disk and HDD
- Built-in Web Server, Supporting Web Browser Control Across All Platforms

4K Input & Loop-out for Hybrid Event

All HDMI interfaces support 4K input, with an additional 4K loop output that can be directly connected to external display.

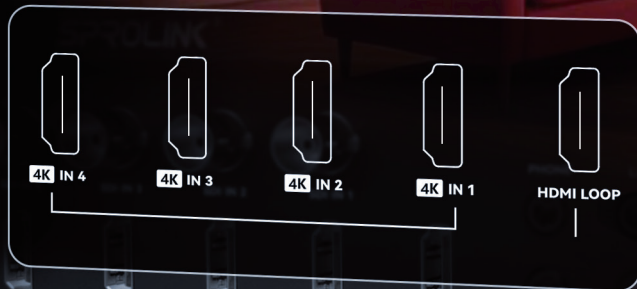



3-Channel Audio Faders

Support flexible channel assignment for each audio fader, and offer more precise audio control experience.

Dual-Channel XLR Audio Interface

Dual 3.5mm & Dual XLR Audio Inputs. Compatible with both mic and professional Audio mixer.



Speech-to-Text for Caption

Capture live audio feed and use AI to intelligently recognize speech and generate real-time subtitles.



SPECIFICATIONS

Interface	Input	3G-SDI	4xSDI	SDI 1080p Input	Output Resolution	HDMI	SMPTE	720p@50/60 1080p@24/30/50/60
		HDMI 2.0	4xHDMI	HDMI 4k Input		USB 3.0	Video Streaming	720p@50/60 1080p@24/30/50/60
		USB 2.0	2xUSB	USB-A				
	Output	3G-SDI	1xSDI	PGM Output	Performance	Video Sampling		YUV 4:4:4
		HDMI 1.3	1xHDMI-A	PGM Output		System Latency		<3 Frames
		HDMI 1.3	1xHDMI-A	PVW / PGM / PST Selectable Output		Audio Delay		0-500ms (0-30/25 Frame)
	Audio	USB 3.0	1xUSB Type-C	UVC Output	Power	Input Power		12V/2A
						Constant Power Consumption		20W
	MIC IN	2x3.5mm Audio Jacks	Compatible With Mic/line Stereo Input	Operating Environment	Operating Temperature	0°C~70°C		
		2x6.35mm XLR Jacks	Compatible With Mic/line Stereo Input			Operating Humidity		10%~85%
	PHONES	1x3.5mm Audio Jack	Monitoring Output					
	Control	LAN	1xRJ45	Weight	Equipment Weight	3kg		
	HDMI	SMPTE	720p@50/60 1080i@50 1080p@24/30/50/60	Size	Equipment Size	340mm x 212mm x 80mm		
		VESA	1024x768@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1440x900@60 1600x1050@60 1680x1050@60 1920x1080@23.98/24/25/29.97 /30/50/59.94/60 3840x2160@30/50/60					



XIAMEN SPROLINK SCIENCE & TECHNOLOGY CO., LTD

Unit 1007-1010, 2nd Building, Torch Xinke Plaza,
Huli District, Xiamen, Fujian, China

sales@sprolink.com

0592-5565698

www.sprolink.com

