SPROLINK®

Audio and Video
Processing Equipment



NeoLIVE ME5

Multi-Functional
Live Streaming Switcher with Touch Screen



10.1 Inch Touch Screen

- Supports Dual USB Ports USB Recording and USB Feed Simultaneously
- Supports Flexible PGM & MV Output
- Supports Landscape & Portrait Layout Within the Screen for Various Scenarios
- Dual Channel RTMP Streaming Through Ethernet
- Built-in Media Player for Direct Playback
- Supports Recording by USB Disk and HHD
- Built-in Web Server, Supporting Web Browser Control Across All Platforms
- Dual-Channel XLR Audio Interface

4K Input & Loop-out for Hybird Event

All HDMI interfaces support 4K input, with an additional 4K loop output that can be directly connected to external display.

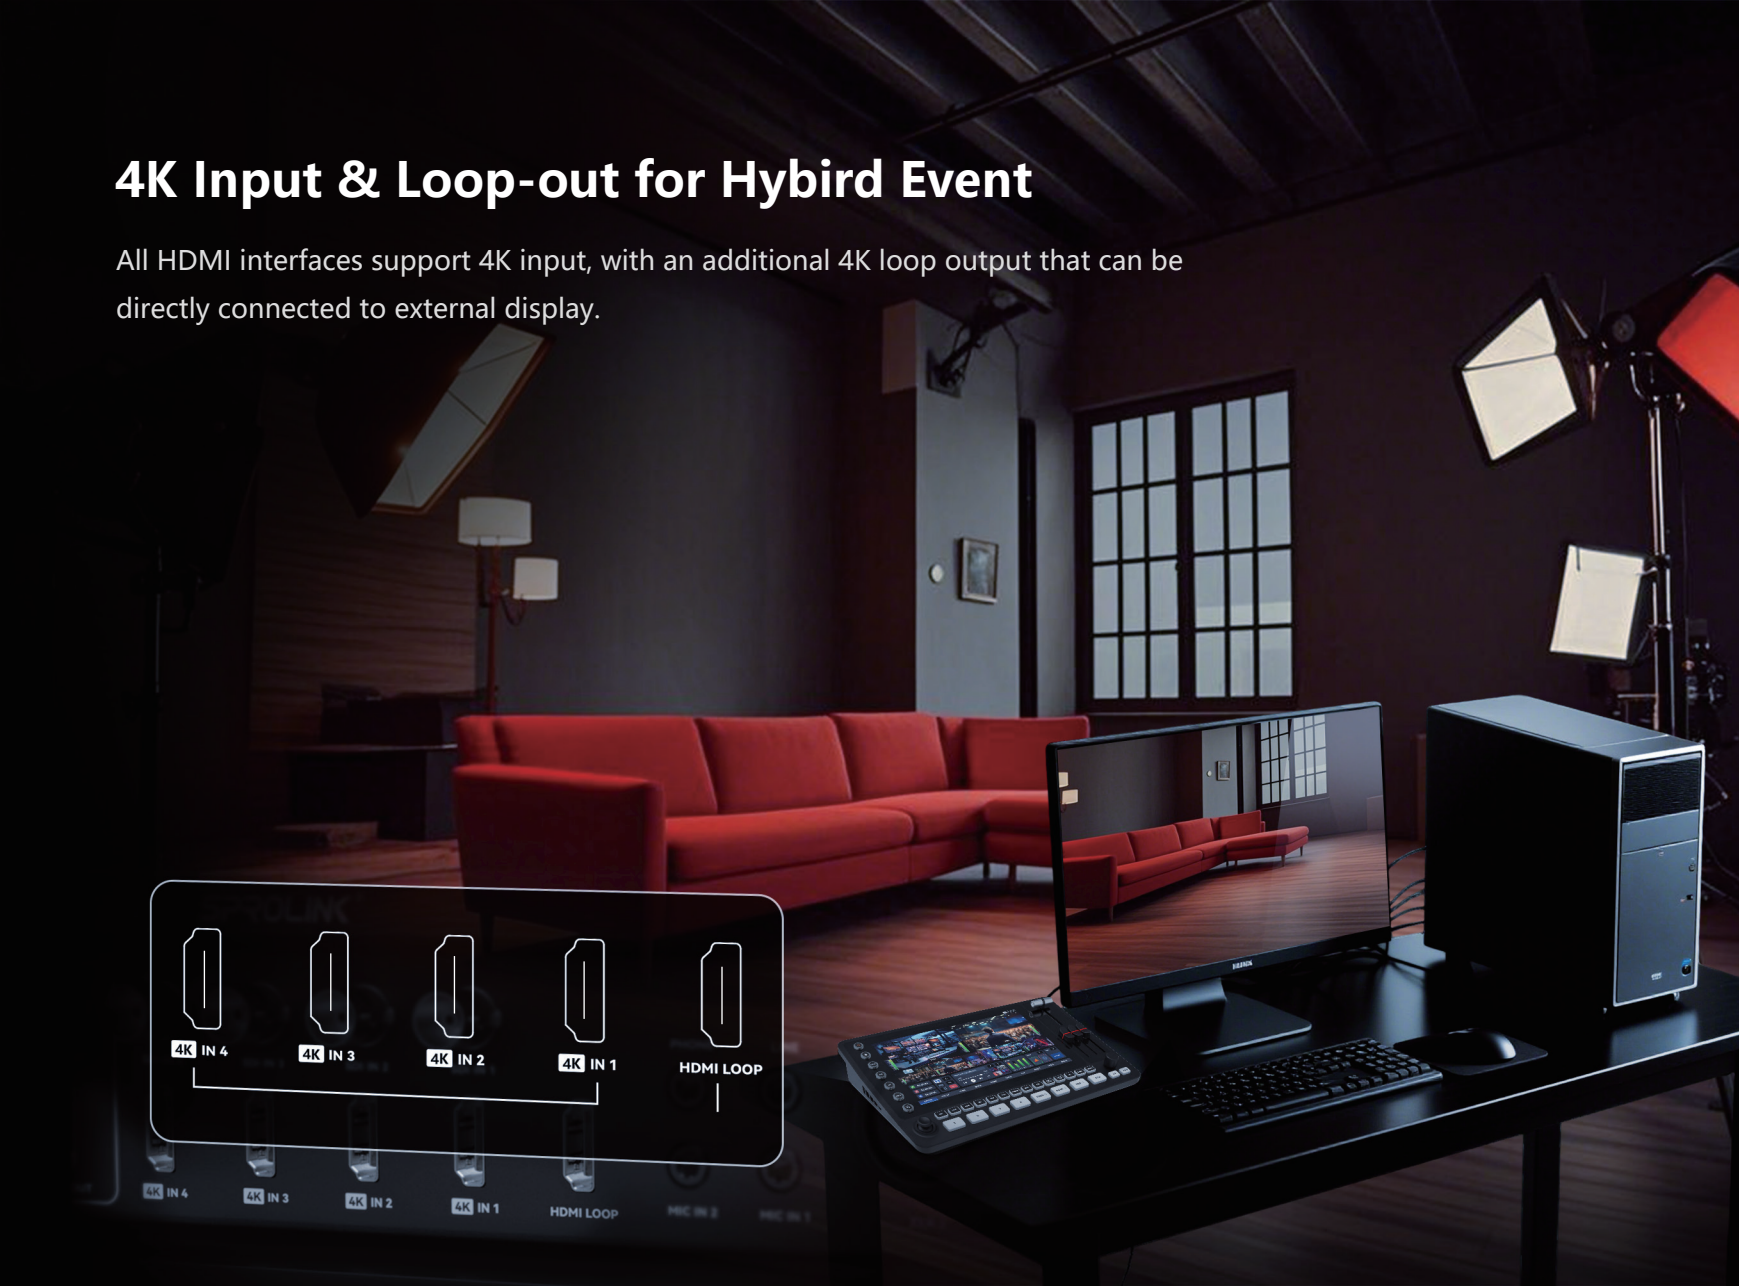



3-Channel Audio Faders

Support flexible channel assignment for each audio fader, and offer more precise audio control experience.



Dual-Channel XLR Audio Interface

Dual 3.5mm & Dual XLR Audio Inputs. Compatible with both mic and professional Audio mixer.

Speech-to-Text for Caption

Capture live audio feed and use AI to intelligently recognize speech and generate real-time subtitles.



SPECIFICATIONS

Interface	Input	3G-SDI	4xSDI	SDI 1080p Input
		HDMI 2.0	4xHDMI	HDMI 4k Input
		USB 2.0	2xUSB USB-A	Video Playback/image Loading/uvc Input
	Output	3G-SDI	1xSDI	PGM Output
		HDMI 1.3	1xHDMI-A	PGM Output
		HDMI 1.3	1xHDMI-A	PVW / PGM / PST Selectable Output
		USB 3.0	1xUSB Type-C	UVC Output
	Audio	MIC IN	2x3.5mm Audio Jacks	Compatible With Mic/line Stereo Input
			2x6.35mm XLR Jacks	Compatible With Mic/line Stereo Input
		PHONES	1x3.5mm Audio Jack	Monitoring Output
		LINE OUT	1x3.5mm Audio Jack	Linear Output
	Control	LAN	1xRJ45	Network Control
				PTZ Camera Control
Input Resolution	SDI HDMI	720p50/60、1080i50/60 、1080p24/30/50/60 720p50、720p59.94、720p60、1080p23.98、 1080p24、 1080p25 1080p29.97、1080p30、 1080p50、 1080p59.94、1080p60、1080i50 1080i59.94、1080i60、2160p30/50/60		

Output Resolution	HDMI	SMPTE	1080p24/25/30/48/50/60
	USB 3.0	Video Streaming	1080p24/25/30/48/50/60
Performance	Video Sampling		YUV 4:4:4
	System Latency		<3 Frames
	Audio Delay		0-500ms (0-30/25 Frame)
Power	Input Power		12V/3A
	Constant Power Consumption		30W
Operating Environment	Operating Temperature		0℃~70℃
	Operating Humidity		10%~85%
Weight	Equipment Weight		2.15kg
Size	Equipment Size		340mm x 212mm x 80mm



XIAMEN SPROLINK SCIENCE & TECHNOLOGY CO., LTD

Unit 1007-1010, 2nd Building, Torch Xinke Plaza,
Huli District,Xiamen,Fujian,China

sales@sprolink.com

0592-5565698

www.sprolink.com